MITSUBISHI ELECTRIC

Changes for the Better

for a greener tomorrow

CLOSE CONTROL SYSTEM

PFD

PFD-P250VM-E
PFD-P500VM-E
PUHY-P250YJM-A(-BS)
PUHY-P500YSJM-A(-BS)
PQHY-P250YHM-A

CLOSE CONTROL SYSTEM

MITSUBISHI ELECTRIC's Close Control System (PFD series) is specifically designed for computer rooms, laboratories etc, where strict control of humidity and temperature is a must.
It possesses "High Reliability", "Energy Saving Technology", and "Easy Installation / Maintenance".
It can be connected to a computer network using our AG-150A controller, in order to monitor from a distance and provide remote email alarms.

High Reliability

Precise Room Temperature Control
PFD series maintain a nearly constant room temperature (within ±1.0˚C) without the typical temperature changes that occur with conventional ON/OFF control systems with inverter driven compressor.
❊ Depending on the loading conditions

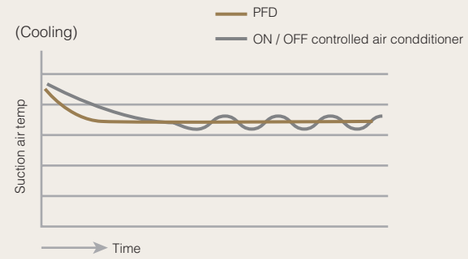

Quick Recovery from Power Failure
After an initial setting of outdoor unit is completed within 20 seconds of power recovery, thermo ON signal will turn on and it will take 5 seconds for an outdoor unit fan and compressor operation to start. PFD unit will restart within 20 seconds+(indoor unit address/2). To prevent the inrush current when recovering from power failure, the indoor unit system will restart one by one.

(example)

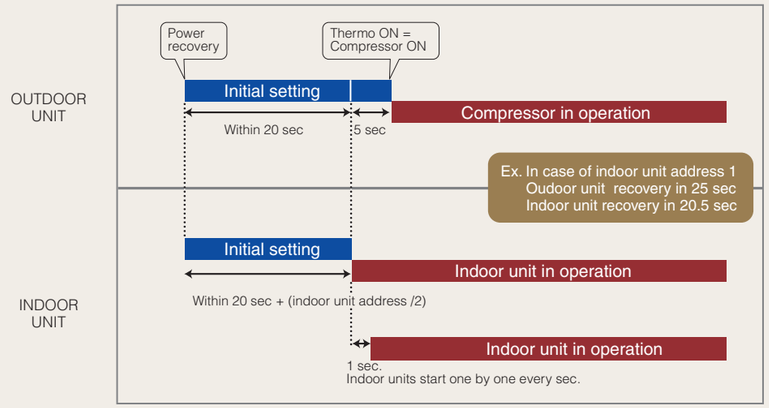
Power recovery
Thermo ON = Compressor ON
OUTDOOR UNIT
Initial setting
Compressor in operation
Within 20 sec
5 sec
Ex. In case of indoor unit address 1
Oudoor unit recovery in 25 sec
Indoor unit recovery in 20.5 sec
Initial setting
Indoor unit in operation
INDOOR UNIT
Within 20 sec + (indoor unit address /2)
Indoor unit in operation
1 sec.
Indoor units start one by one every sec.

Protection of Confidential Information
As a compressor has been incorporated into the outdoor unit, the compressor can be serviced without entering a computer room. Our close control system can protect confidential information.

NEW **PFD System Rotation**
One unit in a system will alternatively be in stand-by position as a back-up unit in case of malfunction.

PFD series provide you with highly reliable computer room cooling system

CLOSE CONTROL SYSTEM

Energy Saving Technology

Low Running Cost

The inverter driven compressors can maximize the energy efficiency of PFD series, leading to reduction of power consumption.
PFD series coefficient of performance (COP) are over 3.00 in cooling mode.
[Sensible heat factor (SHF) : 0.93]

Low Power Consumption

Plus, new PFD series adopt advanced R410A refrigeration and control technology to offer lower power consumption.

Inverter-driven capacity control

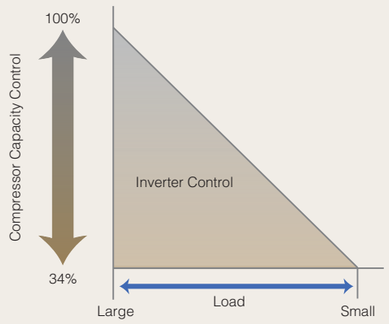

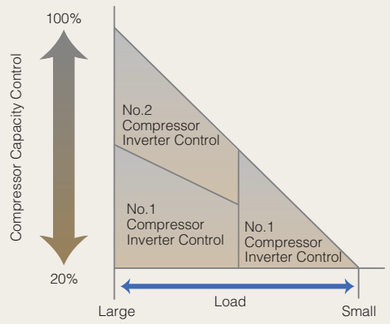

PFD series operates highly efficiently with using newly developed inverter compressor

Energy Saving Technology

Minimum Humidifiers

PFD series work without a large capacity humidifier in most specifications. Due to the use of an optimized inverter driven compressor, PFD series minimize the excessive dehumidification whereas other systems need a separate humidifier for each indoor unit.

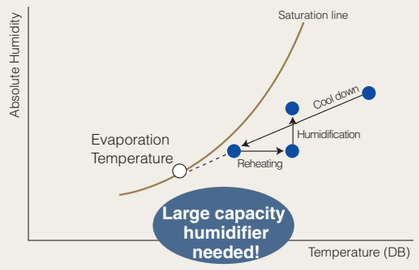

Common Close Control Air Conditioner

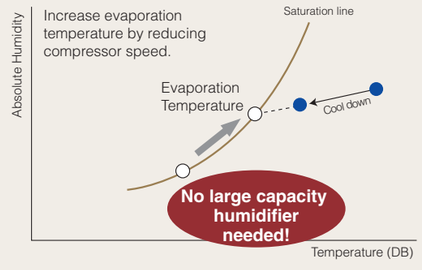

PFD Series

This system will also help to minimize maintenance costs by removing the need for a large capacity humidifier.



Common Close Control Air Conditioner



PFD Series

❉ A humidifier can be incorporated inside of the units. Consult our sales office in your area for more detailed information.

PFD series will not have excessive dehumidification

Easy Installation/Maintenance

Small Installation Space

PFD series are specifically designed to minimize the size of the indoor units and save on valuable computer room space.

Service Space (Indoor)

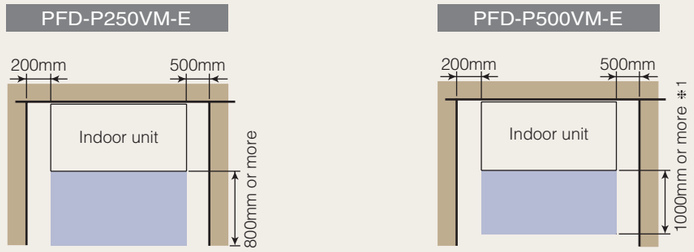

⁜1. It is necessary for the removal of the panel beyond 600mm.

Piping length

With long pipe-runs of up to 165m, top-bottom differentials of 50m (40m if the outdoor unit is installed below indoor unit, 15m if the outdoor temperature is under 10˚C), flexible design is available with both air and water cooled outdoor unit.

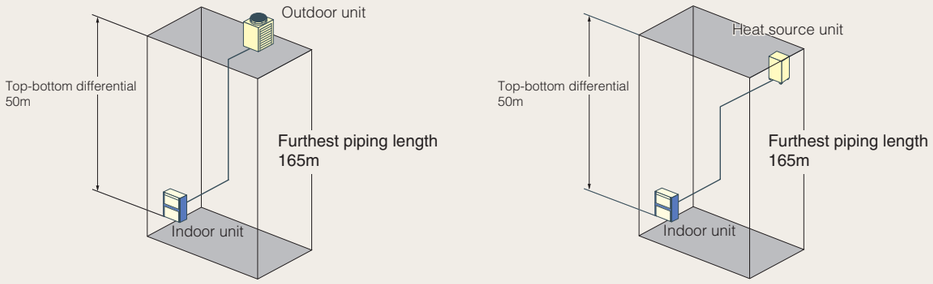

⁜ Same length with two refrigerant circuit connection

Unit Combination

PFD + Air cooled outdoor unit

When connecting PFD-P500VM-E and P500 outdoor unit, either 1 or 2 refrigerant circuit connection is available depending on system size and usage. With 2 refrigerant circuit connection, one circuit can back up the other.
If installation and large number of units are to be installed, single refrigerant circuit can be selected.

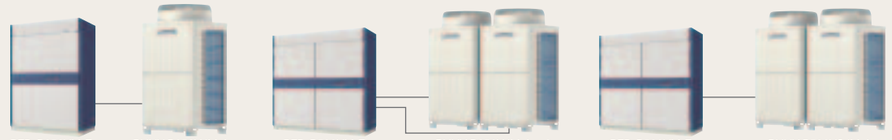

⁜ At factory shipment, this model of indoor unit is designed and set to accommodate a single refrigerant circuit.
Connection of two refrigerant circuits to the indoor unit requires setting change and pipe work.

PFD + Water cooled outdoor unit

When connecting PFD-P500VM-E unit and water cooled outdoor unit, only 2 refrigerant circuit connection is available and single refrigerant connection is not available.

⁜ Single refrigerant circuit connection is not available with water-cooled unit.

Operation Zone

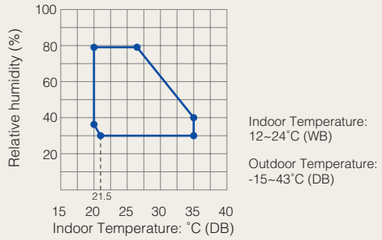

Indoor Temperature:
12~24˚C (WB)

Outdoor Temperature:
-15~43˚C (DB)

PFD series will be able to satisfy various installation conditions

OUTDOOR UNIT

AIR COOLED OUTDOOR UNIT

Outdoor Unit

High-capacity reluctance DC motor driven compressor

Motor efficiency greatly improved

+

Reduced suction refrigerant heating loss

First in Industry

Japan Machinery Federation
Executive Award-winning

Low Noise in All Directions

(10HP)



⁜Measured in anechoic room



Low noise mode can reduce sound level by sensing ambient temperature condition.
(This function is available in setting at site.)

PFD series are made in Japan under a stringent quality control system of Mitsubishi Electric.

WATER COOLED HEAT SOURCE UNIT

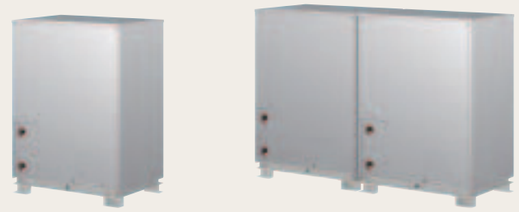

Heat source Unit

Cold climate capability

Because the system is water cooled, the outdoor air temperature does not affect capacity. Futhermore, water cooling means no defrost operation is required, so rapid starting assures quick and continuous cooling in the hottest conditions.

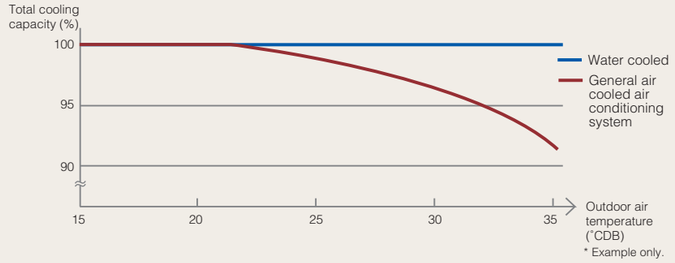

Heat recovery

When used in combination with the City Multi WR2 series, Heat recovery between Heat Source Units is possible.

Example of water cooled system diagram ▶

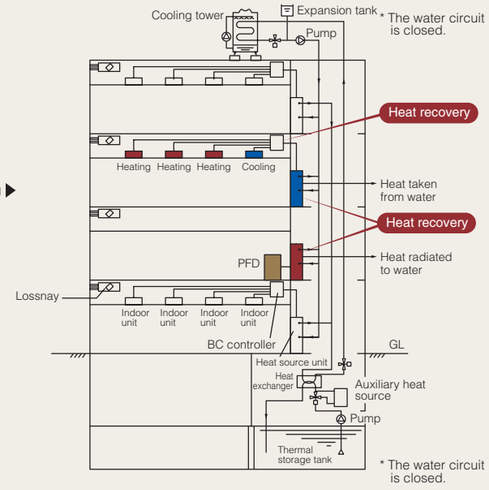

Water cooled PFD series offers reliability and energy-saving that computer rooms require.

CONTROL

Remote Controller

Embedded MA remote controller and display lamps on the PFD unit enables easy control and operation.

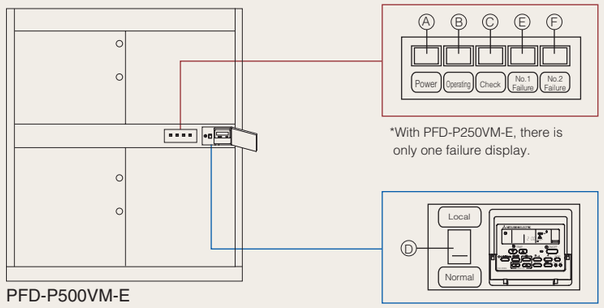

PFD-P500VM-E

*With PFD-P250VM-E, there is only one failure display.

Ⓐ Power display lamp
Ⓑ Operation display lamp
Ⓒ Check display lamp
Ⓓ Normal / Local switch
Ⓔ No.1 Failure display lamp
Ⓕ No.2 Failure display lamp

* When Local operation is available at maintenance, please set "Normal / Local" switch to "Local". Then "Check" lamp will be lit.

Centralized Controller

With a new colored touch panel, and continuation of all the conventional G-50A functions, AG-150A visualizes its functions from basic control to advanced operations and bringing an ultimate controller to reality.

Centralized controller AG-150A

Option : Black surface cover
PAC-YG71CBL

Expansion Controller PAC-YG50ECA

Dimensions: 250(W) x 217(H) x 97.2(D) mm
: 9-7/8(W) x 8-9/16(H) x 3-7/8(D) in.

With a connection of a Expansion Controller, maximum of 150 units/groups can be connected to AG-150A.

New Design

Backlight Color liquid crystal display
Backlight makes it easy to see and control units.
One can identify whether a unit is ON or OFF from a distance.
Control in the night with no lights is possible.

Touch panel
9 inch wide, high-resolution
Touch panel enables operation of units by touching with index finger.
When object unit is touched, orange box appears around the unit icon indicating the unit selected.

USB memory compatible
All measurement/initial setting CSV data extractable with USB memory.
Can save and overwrite setting data.

New Functions

Controllable units/groups
Controls up to 50 units/groups (including indoor units, LOSSNAY, DIDO/AI/PI controller)
Up to 150 units can be controlled via expansion controller;PAC-YG50ECA (AG-150A software needs to be upgraded)

Monitoring functions
Temperature/Humidity (using AI controller with WEB browser) *1
General equipment such as lights on LCD (using DIDO controller)
Interlock function from AI controller, DIDO controller to indoor units and between DIDO units are available.
AG-150A interlock with DIDO controller or free contact on an indoor unit available. *Ver. 2.30 or later

Energy saving functions
Seasonal scheduling and automatic switch over *1
Yearly scheduling on LCD *1

*1 License required.

System structure

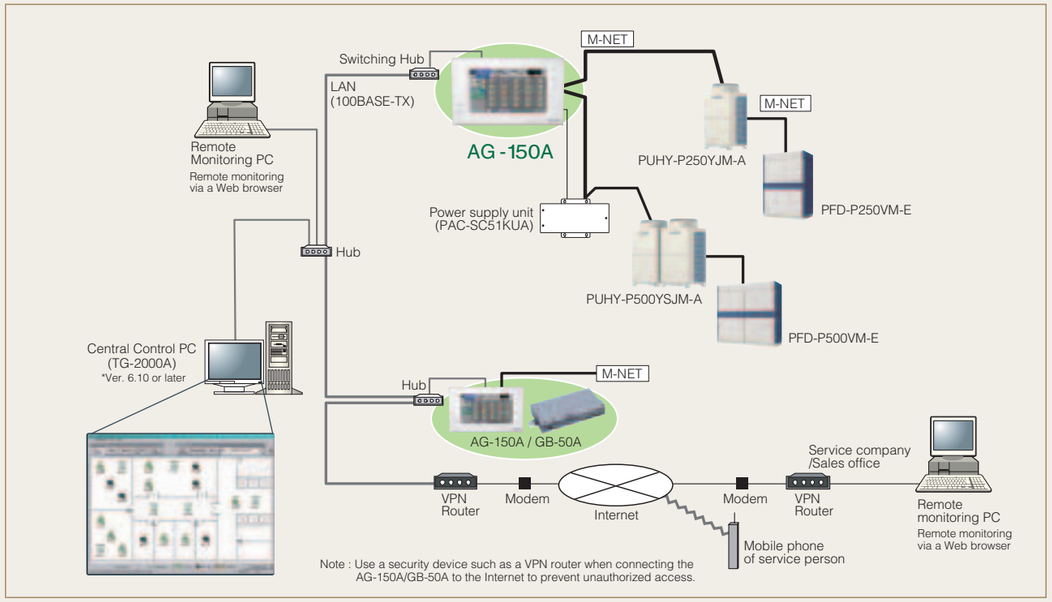

Indoor Unit

PFD-P250VM-E (down flow)

Specification

Model name			PFD-P250VM-E	
			Cooling	Heating
Capacity		kW	28.0	31.5
		BTU/h	95,500	107,500
Sensible Heat Capacity		kW	26.0	—
		BTU/h	88,700	—
Power source			3N~380 / 400 / 415V (50Hz) , 400 / 415V (60Hz)	
Power input		kW	2.50	
Current		A	5.3 / 5.0 / 4.9	
Fan	Type X Quantity		Sirocco fan x 1	
	Airflow rate	m^3/min	160	
	Motor output	kW	2.2	
Refrigerant			R410A	
External finish			Galvanized steel plate (with polyester coating)	
			<MUNSEL 2.9GY 8.6 / 0.3 (White) or similar>	
			<MUNSEL 7.2GB 3.2 / 5.3 (Blue) or similar>	
External dimension	(H) x (W) x (D)	mm	1950 x 1380 x 780	
Protection device	Fan		Thermal switch	
Refrigerant piping diameter	Liquid / Gas		ø 9.52 Brazed (ø12.7 for over 90m) / ø 22.2 Brazed	
Sound pressure level		dB (A)	59	
Net weight		kg	380	
Operating temperature range	Indoor		12 ~ 24˚C (54 ~ 75˚F) W.B.	15 ~ 28˚C (59 ~ 82˚F) D.B.
	(Outdoor)		(-15 ~ 43˚C (5 ~ 109˚F) D.B.)	(-15 ~ 15.5˚C (5 ~ 60˚F) W.B.)
	(Water)		(10 ~ 45˚C (50 ~ 113˚F))	(10 ~ 45˚C (50 ~ 113˚F))

Note: 1. Cooling / Heating capacity indicates the maximum value at operation under the following condition.
<Cooling> Indoor : 27˚C (81˚F) DB / 19˚C (66˚F) WB Outdoor : 35˚C (95˚F) DB (Air cooled) / Water temperature 30˚C (86˚F) (Water cooled)
<Heating> Indoor : 20˚C (68˚F) DB Outdoor : 7˚C (45˚F) DB / 6˚C (43˚F) WB (Air cooled)/ Water temperature 20˚C (68˚F) (Water cooled)
Pipe length : 7.5m Level difference: 0m
2. The sound pressure level is measured in an anechoic room.
3. Heating can be used only by the indoor warming-up.
4. Works not included : Installlation / foundation work, electric connection work, duct work, insulation work,
The power source switch and other items are not specified in the specifications.
5. It is necessary to change pulley and v-belt when using it by the power supply frequency 60Hz.
6. If units are operated for a long time at the relative humidity of 80% or more, condensate may collect and drip from the indoor units.

External Dimensions

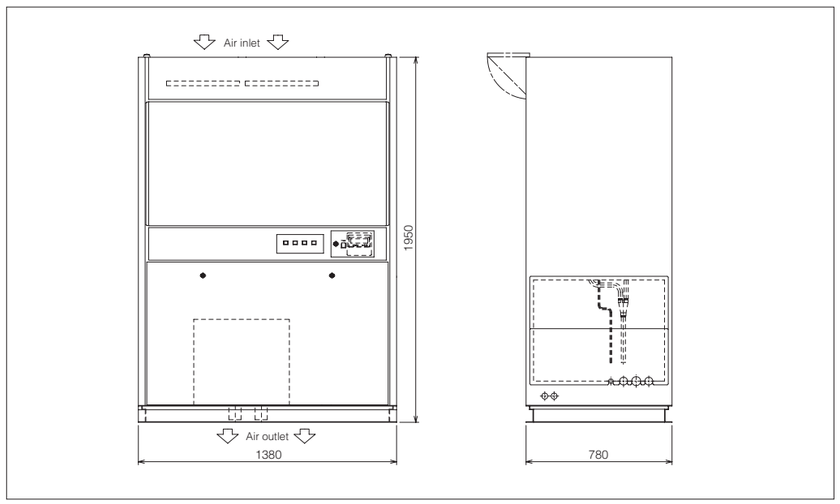

Indoor Unit

PFD-P500VM-E (down flow)

Specification

Model name			PFD-P500VM-E	
			Cooling	Heating
Capacity		kW	56.0	63.0
		BTU/h	191,100	215,000
Sensible Heat Capacity		kW	52.0	—
		BTU/h	177,400	—
Power source			3N~380 / 400 / 415V (50Hz) , 400 / 415V (60Hz)	
Power input		kW	5.00	
Current		A	9.5 / 9.0 / 8.7	
Fan	Type X Quantity		Sirocco fan x 2	
	Airflow rate	m^3/min	320	
	Motor output	kW	4.4	
Refrigerant			R410A	
External finish			Galvanized steel plate (with polyester coating)	
			<MUNSEL 2.9GY 8.6 / 0.3 (White) or similar>	
			<MUNSEL 7.2GB 3.2 / 5.3 (Blue) or similar>	
External dimension	(H) x (W) x (D)	mm	1950 x 1980 x 780	
Protection device	Fan		Thermal switch	
Refrigerant piping diameter	Liquid / Gas		Single refrigerant circuit : ø 15.88 Brazed / ø 28.58 Brazed	
			Two refrigerant circuits : ø 9.52 x 2 (ø12.7 x 2 for over 90m) Brazed / ø 22.2 x 2 Brazed	
Sound pressure level		dB (A)	63	
Net weight		kg	520	
Operating temperature range	Indoor		12 ~ 24˚C (54 ~ 75˚F) W.B.	15 ~ 28˚C (59 ~ 82˚F) D.B.
	(Outdoor)		(-15 ~ 43˚C (5 ~ 109˚F) D.B.)	(-15 ~ 15.5˚C (5 ~ 60˚F) W.B.)
	(Water)		(10 ~ 45˚C (50 ~ 113˚F))	(10 ~ 45˚C (50 ~ 113˚F))

Note: 1. Cooling / Heating capacity indicates the maximum value at operation under the following condition.
<Cooling> Indoor : 27˚C (81˚F) DB / 19˚C (66˚F) WB Outdoor : 35˚C (95˚F) DB (Air cooled) / Water temperature 30˚C (86˚F) (Water cooled)
<Heating> Indoor : 20˚C (68˚F) DB Outdoor : 7˚C (45˚F) DB / 6˚C (43˚F) WB (Air cooled)/ Water temperature 20˚C (68˚F) (Water cooled)
Pipe length : 7.5m Level difference: 0m
2. The sound pressure level is measured in an anechoic room.
3. Heating can be used only by the indoor warming-up.
4. Works not included : Installlation / foundation work, electric connection work, duct work, insulation work,
The power source switch and other items are not specified in the specifications.
5. It is necessary to change pulley and v-belt when using it by the power supply frequency 60Hz.
6. If units are operated for a long time at the relative humidity of 80% or more, condensate may collect and drip from the indoor units.

External Dimensions

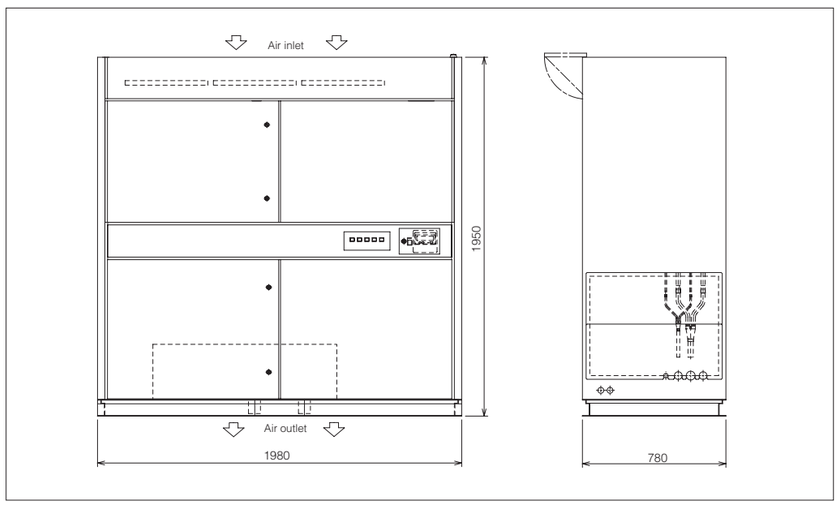

Outdoor Unit

PUHY-P250, P500Y(S)JM-A (-BS)
(connected with PFD series.)

Specification

Model name				PUHY-P250YJM-A (-BS)		PUHY-P500YSJM-A (-BS)	
				Cooling	Heating	Cooling	Heating
Capacity			kW	28.0	31.5	56.0	63.0
			BTU/h	95,500	107,500	191,100	215,000
Power source				3N~380 / 400 / 415V (50Hz / 60Hz)			
Power input			kW	6.80	6.60	13.60	13.20
Current			A	11.4 / 10.9 / 10.5	11.1 / 10.5 / 10.2	22.8 / 21.8 / 21.0	22.2 / 21.0 / 20.4
Fan	Type X Quantity			Propeller fan x 1		Propeller fan x 2	
	Airflow rate		m^3/min	170		170 x 2	
	Motor output		kW	0.46 x 1		0.46 x 2	
Refrigerant				R410A			
External finish				Pre-coated galvanized steel sheets (+ powder coating for-BS type)			
				<MUNSEL 5Y8 / 1 or similar>			
External dimension	(H) x (W) x (D)		mm	1710 (without legs 1650) x 920 x 760		1710 (without legs 1650) x 920 x 760	1710 (without legs 1650) x 920 x 760
Protection device	High pressure protection			High pres. Sensor & High pres. Switch at 4.15 MPa (601psi)			
	Inverter circuit (COMP. / FAN)			Over-heat protection, Over-current protection			
	Compressor			Over-heat protection			
	Fan motor			Thermal switch			
Refrigerant piping diamete		Liquid / Gas		ø 9.52 Brazed (ø 12.7 for over 90m) / ø 22.2 Brazed		ø 15.88 Brazed / ø 28.58 Brazed	
Sound pressure level			dB (A)	58		61	
Net weight			kg	200		200 x 2	
Operating temperature range		Outdoor		-15 ~ 43˚C (5 ~ 109˚F) D.B.	-15 ~15.5˚C (5 ~ 60˚F) W.B.	-15 ~ 43˚C (5 ~ 109˚F) D.B.	-15 ~15.5˚C (5 ~ 60˚F) W.B.
		(Indoor)		(12 ~24˚C (54 ~ 75˚F) W.B.)	(15 ~ 28˚C (59 ~ 82˚F) D.B.)	(12 ~24˚C (54 ~ 75˚F) W.B.)	(15 ~ 28˚C (59 ~ 82˚F) D.B.)

Note: 1. Cooling / Heating capacity indicates the maximum value at operation under the following condition.
<Cooling> Indoor : 27˚C (81˚F) DB / 19˚C (66˚F) WB Outdoor : 35˚C (95˚F) DB
<Heating> Indoor : 20˚C (68˚F) DB Outdoor : 7˚C (45˚F) DB / 6˚C (43˚F) WB
Pipe length : 7.5m Level difference: 0m
2. The sound pressure level is measured in an anechoic room.
3. Heating can be used only by the indoor warming-up.
4. Works not included : Installlation / foundation work, electric connection work, duct work, insulation work,
The power source switch and other items are not specified in the specifications.

External Dimensions

PUHY-P250YJM-A

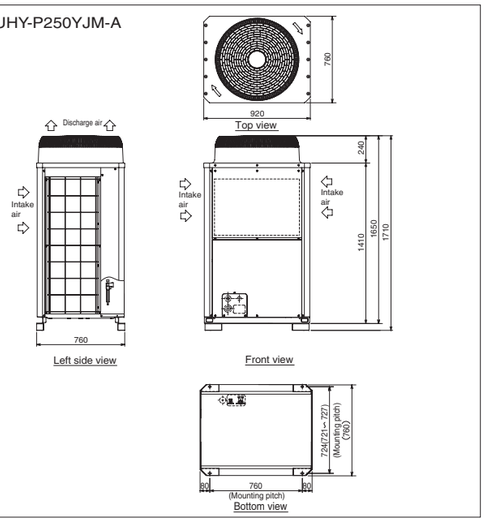

PUHY-P500YSJM-A

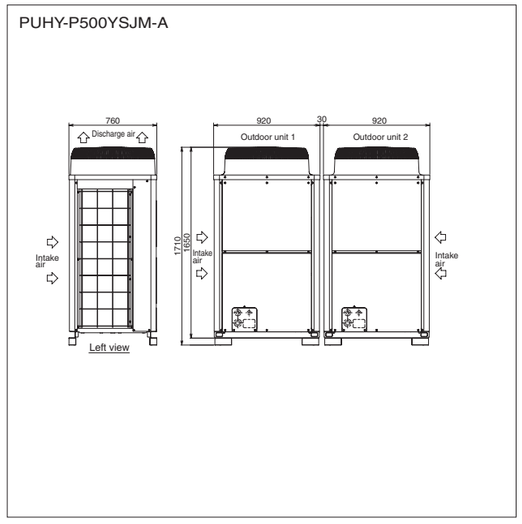

Heat Source Unit

PQHY-P250YHM-A
(connected with PFD series.)

Specification

Model name				PQHY-P250YHM-A	
				Cooling	Heating
Capacity			kW	28.0	31.5
			BTU/h	95,500	107,500
Power source				3N~380 / 400 / 415V (50Hz / 60Hz)	
Power input			kW	5.45	5.51
Current			A	9.2 / 8.7 / 8.4	9.3 / 8.8 / 8.5
Compressor	Type			Inverter scroll hermetic compressor	
	Motor output		kW	6.3	
Heat exchanger	Type			plate	
	Water volume in the plate		ℓ	5.0	
Circulating water	Volume		m^3/h	5.76	
			cfm	3.4	
	Pressure drop		kPa	17	
Refrigerant				R410A	
External finish				Acrylic painted steel plate	
External dimension	(H) x (W) x (D)		mm	1160 (1100 without legs) x 880 x 550	
Protection device	High pressure protection			High pressure sensor, High pressure switch 4.15 MPa (601psi)	
	Compressor			Over-heat protection	
	Inverter			Over-heat protection, Over-current protection	
Refrigerant piping diameter		Liquid / Gas		ø 9.52 Brazed (ø 12.7 for over 90m) / ø 22.2 Brazed	
Sound pressure level			dB (A)	49	
Net weight			kg	195	
Operating temperature range		Water		10 ~ 45˚C (50 ~ 113˚F)	10 ~45˚C (50 ~ 113˚F)
		(Indoor)		(12 ~24˚C (54 ~ 75˚F) W.B.)	(15 ~ 28˚C (59 ~ 82˚F) D.B.)

Note: 1. Cooling / Heating capacity indicates the maximum value at operation under the following condition.
<Cooling> Indoor : 27˚C (81˚F) DB / 19˚C (66˚F) WB Water temperature : 30˚C (86˚F)
<Heating> Indoor : 20˚C (68˚F) DB Water temperature : 20˚C (68˚F)
Pipe length : 7.5m Level difference : 0m
2.The ambient temperature of the heat source unit needs to be kept below 40˚C (104˚F) DB.
3.The ambient relative humidity of the heat source unit needs to be kept below 80%.
4.The heat source Unit should not be installed at outdoor.
5.Be sure to mount a strainer (more than 50 meshes) at the water inlet piping of the unit.
6.Be sure to provide interlocking for the unit operation and water circuit.
7. It is measured in anechoic room.

External Dimensions

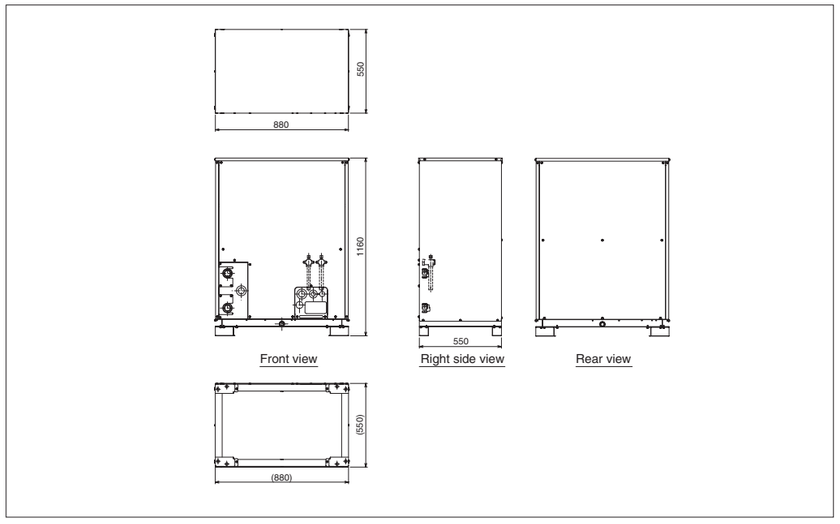

for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.

FM33568 / ISO 9001;2008

The Air Conditioning & Refrigeration Systems Works acquired ISO 9001 certification under Series 9000 of the International Standard Organization (ISO) based on a review of Quality management for the production of refrigeration and air conditioning equipment.

ISO Authorization System
The ISO 9000 series is a plant authorization system relating to quality management as stipulated by the ISO. ISO 9001 certifies quality management based on the "design, development, production, installation and auxiliary services" for products built at an authorized plant.

EC97J1227 051

The Air Conditioning & Refrigeration Systems Works acquired environmental management system standard ISO 14001 certification.

The ISO 14000 series is a set of standards applying to environmental protection set by the International Standard Organization (ISO).
Registered on March 10, 1998.

⚠NOTICE

■When installing or relocating the air conditioners, use only the specified refrigerant (R410A) to charge the refrigerant lines.
Do not mix any other refrigerant and do not allow air to remain the lines.
If air is mixed with refrigerant, then it can be the cause of abnormal high pressure in the refrigerant lines, and may result in an explosion and other hazards.
The use of any refrigerant other than that specified for the system will cause mechanical failure or system malfunction or unit breakdown.
In the worse case, this could lead to a serious impediment to securing product safety.
MITSUBISHI ELECTRIC CORPORATION cannot be held responsible for malfunctions or accidents resulting from the use of the wrong type of refrigerant.

MITSUBISHI ELECTRIC CORPORATION

http://Global.MitsubishiElectric.com

MEE10K033

New publication effective Mar. 2011
Specifications subject to change without notice